

Foldable I-TV


Foldable & liftable
AIO LED display



EFFORTLESS AND INSTANT SETUP

The flight case offers foldable transportation, making it easy to transport and move. With the added convenience of an electric lift, installation becomes effortless. Additionally, the plug-and-play feature ensures a hassle-free setup, allowing for quick and seamless use.

Pre-assembled | Foldable | Liftable | Plug & Play

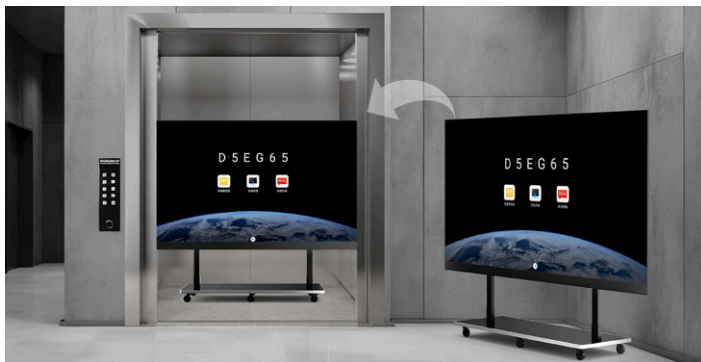

WIRELESS CONTENT SHARING

One-click screen sharing simplifies the process of displaying content from computers, mobile phones, and tablets on the LED screen. Users can easily mirror their devices and have exceptional control using LED Config software.

Low-latency mirroring | LAN screen-sharing for up to 4 windows | LED Config App



HD DISPLAY ON GIANT SCREEN, STUNNING VISUAL DELIGHT

Experience the brilliance of our 16:9 1920x1080P Full HD display with a brightness of 600nits. With high grey scale levels even in low brightness, our self-developed system and multi-stage correction technology ensure stunning visuals. Powered by Hyper Bit 16+4 Bit Processing, our display delivers exceptional image quality.

600nits | 16+4 Bit Processing | 3840HZ

HIGHLY INTEGRATED & SIMPLE MAINTENANCE

Introducing a triple 3-in-1 integrated design, which includes the following components: Control Unit: Sending Card, Android Card, Video Processor. Receiving Unit: Power Supply, Receiving Card, Hub Board. Power Unit: Power Supply, Amplifier, Relay

Triple 3 in 1 | Cable less | GOB Design | Simple Maintenance





SPECIFICATIONS

PRODUCT MODEL	ITV11012-F	ITV13815-F
Pixel Pitch (mm)	1.27	1.58
LED Type	SMD 2210	SMD 1212
Display Diagonal (Inches)	110	138
Overall Dimension (mm)	2453×2317×760	3064×2533×780
Display Area (W×H)	2440×1372	3050×1715
Total Weight (kg)	210	265
Resolution (px)	1920×1080	
Brightness (cd/m2)	600	
Refresh Rate (Hz)	3840	
Contrast	6500:1	
Cabinet Material	Magnalium	
Viewing Angle (H/V)	170/170	
Input Port	3-way HDMI2.0 4K@60Hz Signal Input	
Installation Mode	Mobile Stand	
Maintenance	Front	
Power Consumption (Max./Ave.)(KW)	1.31/0.44	1.87/0.64
Input voltage (V)	AC100-240V 50/60Hz	
Operating Temperature/Humidity (°C/RH)	-10~40/10~85%	