

# LDC1000XXWPR - VSPEC

## OUTDOOR – P2.9 | P3.9 | P4.8 | P6.25



An ultra tough outdoor signage solution with a fine pitch display. Ideal for high traffic and high exposure outdoor areas where screen security is a priority.



### HIGH BRIGHTNESS

- Copper wire: 4300-5000nits
- Gold wire: 3500-7000nits



### 5VB FIREPROOF

- Die-casting Aluminum module
- High temperature durability
- Corrosion protection
- Protection Level from high to low in UL94: 5VB>V0>V1>V2>HB



### FLEXIBLE SIZE


- 500mm\*1000mm
- 500mm\*750mm
- 500mm\*500mm

### LIGHT WEIGHT

- Weight: 33KG/m<sup>2</sup>
- Thickness: 77mm



### PERFECT CURVE

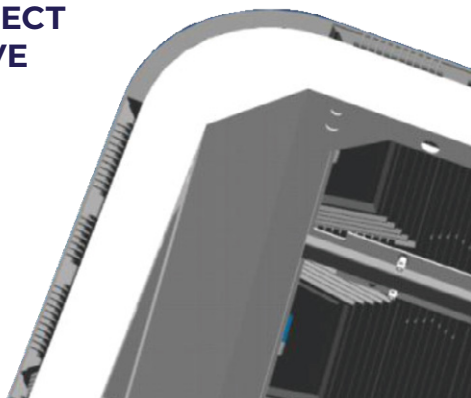

## SPECIFICATIONS

ITEM NUMBER	LDC50029WPR-V	LDC50039HBWPR-V	LDC50039WPR-V	LDC50048WPR-V	LDC50062WPR-V
Pixel Pitch	2.97	3.91	3.91	4.81	6.25
Pixel Density	112896	65536	65536	43264	25600
LED Arrangement	SMD1515	SMD1921	SMD1921	SMD1921	SMD2727
Module Resolution	84*84	128*64	128*64	104*52	84*40
Module Dimension	250*250	500*250	500*250	500*250	500*250
Module Weight	1.0kg	1.85kg	1.85kg	1.85kg	1.7kg
Module Thickness	21.5mm	21.5mm	21.5mm	21.5mm	22mm
Grey Scale (bit)	>15bit	>15bit	>14bit	>15bit	>15bit
Brightness Level	3500-4500nits	6500-7000nits	4800-5000nits	4800-7000nits	6000-9000nits
Cabinet Size (mm)	500*500	500*1000 500*750 500*500	500*1000 500*750 500*500	500*1000 500*750 500*500	500*1000 500*750 500*500
Cabinet Weight (Kg)	36KG/m <sup>2</sup>	33KG/m <sup>2</sup>	33KG/m <sup>2</sup>	33KG/m <sup>2</sup>	33KG/m <sup>2</sup>
Cabinet Thickness	77mm	77mm	77mm	77mm	83.5mm
Max Power Consumption/m <sup>2</sup>	700w/m <sup>2</sup>	650w/m <sup>2</sup>	650w/m <sup>2</sup> – 700w/m <sup>2</sup>	650w/m <sup>2</sup> – 700w/m <sup>2</sup>	550w/m <sup>2</sup> – 600w/m <sup>2</sup>
Ave Power Consumption m <sup>2</sup>	230w/m <sup>2</sup>	230w/m <sup>2</sup>	180w/m <sup>2</sup> – 235w/m <sup>2</sup>	195w/m <sup>2</sup> – 234w/m <sup>2</sup>	165w/m <sup>2</sup>
Visual View Angle	160°/100°	160°/90°	160°/90°	160°/100°	160°/80°
Operating Temperature	-30 – 55°	-30 – 55°	-30 – 55°	-30 – 55°	-30 – 55°
Refresh Rate	>3840Hz	>3840Hz	>3840Hz	>3840Hz	>3840Hz
Protecting Rating	IP66	IP66	IP66	IP66	IP66
Certificate	EMC, CE, FCC, ETL, CB				



### GET IN TOUCH

Phone: +61 1300 841 542

Email: sales@aurorasignage.com.au

Website: www.aurorasignage.com.au

ABN 22 620 120 836